




Joymax N connectors are available with 50 ohm impedance. The frequency range extends to 18GHz, depending on the connector and cable type. The screw-type coupling mechanism provides a sturdy and reliable connection.

Cable terminations are available in crimp and clamp types. N connectors are used in aerospace, Broadcast, Audio & Video applications as well as many microwave components such as filters, couplers, amplifiers and attenuators to kind a handful.

Interface Dimensions:

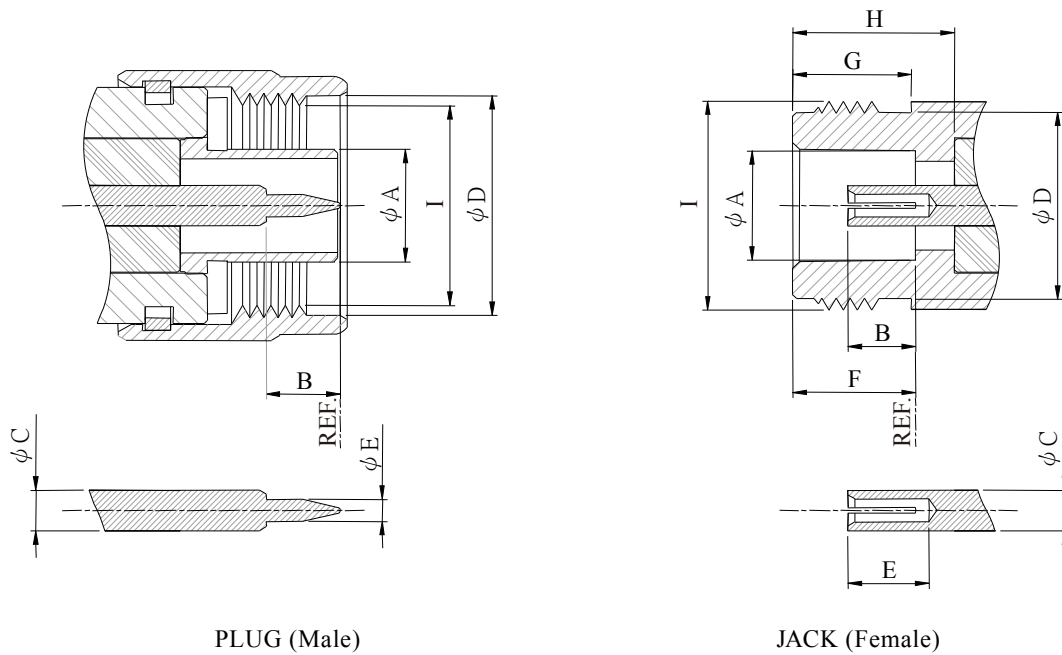

Interface Dimensions in mm (inches)

	PLUG		JACK	
	min.	max.	min.	max.
A	-	8.33 (0.330)	8.03 (0.316)	8.13 (0.320)
B	5.33 (0.210)	5.84 (0.230)	4.75 (0.187)	5.26 (0.207)
C	-	3.15 (0.124)	-	3.15 (0.124)
D	16.00 (0.630)	-	-	15.93 (0.627)
E	1.60 (0.063)	1.68 (0.066)	5.33 (0.210)	-
F	-	-	9.04 (0.356)	9.19 (0.362)
G	-	-	6.76 (0.266)	-
H	-	-	10.72 (0.422)	-
I	5/8-24 UNEF-2B		5/8-24 UNEF-2A	