


## Description

Joymax MCX "snap-on" connectors are designed for an excellent blend of size, weight and durability, they can be used in application from DC to 6GHz and provide broadband capability with constant 50 ohm impedance.

They meet all the high requirements that micro coaxial connectors are expected to satisfy today. There is a high performance of application, such as Mobile and fixed telecommunication, in GPS applications and in Test & measurement system for testing instruments and apparatus, etc.

## Interface Dimensions:

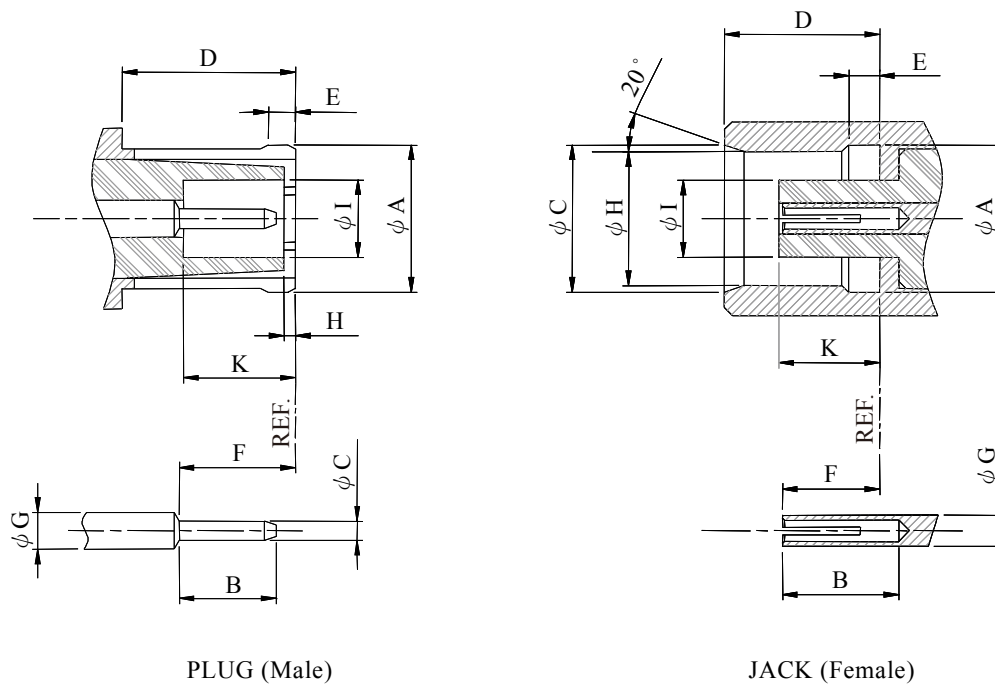

### Interface Dimensions in mm (inches)

	PLUG		JACK	
	min.	max.	min.	max.
A	3.72 (0.146)	3.80 (0.150)	3.60 (0.142)	3.70 (0.146)
B	2.49 (0.098)	2.59 (0.102)	2.80 (0.110)	-
C	0.48 (0.019)	0.53 (0.021)	3.75 (0.148)	3.85 (0.152)
D	4.15 (0.163)	-	4.00 (0.157)	4.12 (0.162)
E	0.70 (0.028)	0.75 (0.030)	0.75 (0.030)	0.85 (0.033)
F	2.80 (0.110)	3.20 (0.126)	2.30 (0.091)	2.80 (0.110)
G	0.95 (0.037) nom.		0.95 (0.037) nom.	
H	-	0.30 (0.012)	3.42 (0.135)	3.48 (0.137)
I	2.00 (0.079)	2.07 (0.081)	1.80 (0.071)	1.98 (0.078)
K	2.80 (0.110)	3.20 (0.126)	2.60 (0.102)	2.80 (0.110)