


Description

Joymax Mini-UHF coaxial connectors are popular and economical, they're used in applications from DC to 2.5GHz with 50ohm impedance.

Mini-UHF connectors are designed for use as coaxial interconnections in Cellular Mobile Phone systems and similar applications where size, weight and cost factors are critical.

Interface Dimensions:

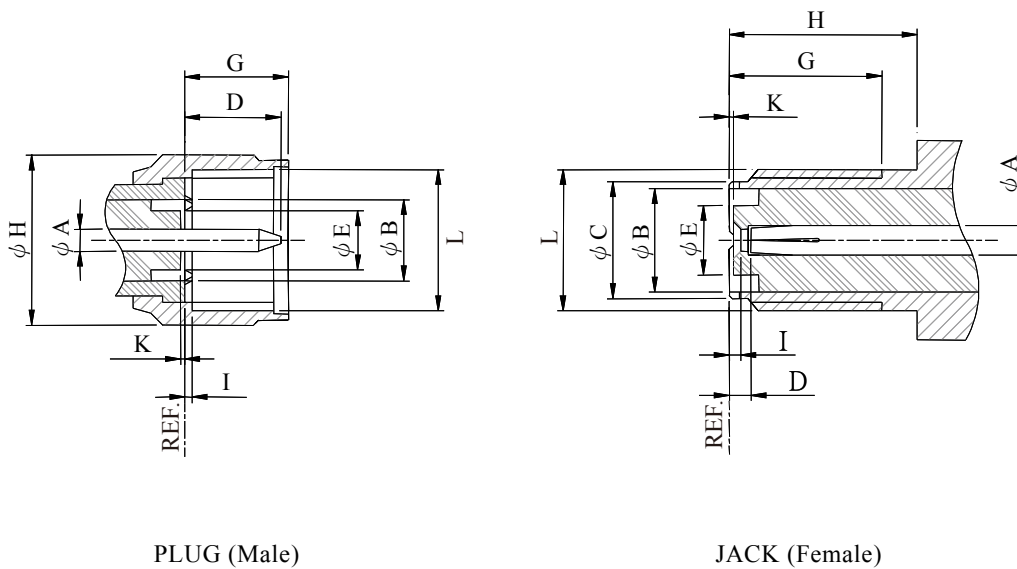

Interface Dimensions in mm (inches)

	PLUG		JACK	
	min.	max.	min.	max.
A	1.50 (0.059)	1.65 (0.065)	2.20 (0.087)	-
B	5.50 (0.217) nom.		7.00 (0.276) nom.	
C	-	-	7.90 (0.311)	8.10 (0.319)
D	6.00 (0.236)	7.30 (0.287)	0.80 (0.031)	2.00 (0.079)
E	4.00 (0.157) nom.		4.70 (0.185) nom.	
G	6.50 (0.256)	8.00 (0.315)	6.50 (0.256)	-
H	-	12.00 (0.472)	7.30 (0.287)	-
I	0.63 (0.025)	0.77 (0.030)	0.63 (0.025)	0.77 (0.030)
K	-	0.70 (0.030)	-	0.50 (0.020)
L	3/8-24 UNF-2B		3/8-24 UNF-2A	